


DY7000

Organic Fiber / NBR

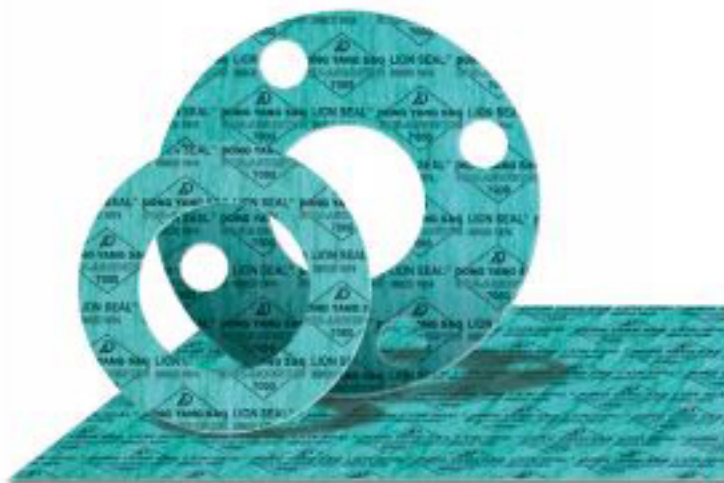

Characteristic

물, 증, 염수 등 압력과 온도에 큰 영향을 받지 않는 일반라인에 적합한 경제적인 시트이다.

This is a non-asbestos which develops at existing asbestos product substitution. Is a product which is suitable in the general line which does not undergo a big influence in the water the fume, brine etc, in pressure and temperature.

Application

Short-term peak Temperature	150°C (423°F)
Short-term peak Pressure	10kgf/cm ² (0.98Mpa)

Sizes

Thickness(mm)	0.5~3.2
Sheet(mm)	1270x1270 / 1270x3810 / 1270x2540 / 2540x3810

- Applied Fluids: Air, Water, Alkali, Salt Solution, Mild Acids
- * Oxygen line, steam line and Explosiveness, Toxic gas line does not apply.